

SPECIFICATIONS

GENERAL

- Power supply : 12 V DC ±10%, max. 1.1 A (main unit)
16 W Max. (with supplied AC adapter)
- Operating temperature range : 0°C to +40°C; 32°F to +104°F
- Operating humidity : 5% to 95% RH
- Dimensions (W×H×D) : 232×38×168 mm;
(Projections are not included) 9.13×1.5×6.61 in
- Weight (main unit only) : 800 g; 1.76 lb (approx.)
- Regulatory compliance : FCC (Part 15 Class B/Part 68), TIA 868-B
ICES-003, ICCS-03
CE Mark, ETSI ES 203 021,
ETSI EG 201 121 (Advisory Note)

INTERFACE

- LAN/WAN : RJ-45 connectors ×2
10BASE-T/100BASE-TX
- Telephone set : RJ-11 connector ×1
- Telephone line : RJ-11 connectors ×2
- Transceiver/repeater : Quick connectors ×2
- External equipment : Quick connectors ×2
- USB : Standard A receptacle ×2

All stated specifications are subject to change without notice or obligation.

OPTIONS



OPC-2274: 5 m (16.4 ft) cable for the IC-FR5000/FR6000 series repeater. D-SUB 25-pin connector.
OPC-2275: 5 m (16.4 ft) cable for a mobile transceiver. RJ-45 modular plug connector with speaker plug.
OPC-2273: 5 m (16.4 ft) cable for the IC-M604A VHF marine transceiver. Waterproof 8-pin connector.
OPC-2276: 5 m (16.4 ft) cable for the HM-152 or SM-26 microphone and external speaker.




Provides 12 V DC, 3.5 A output. Same as supplied.




Converts analog audio and G.711μ IP phone codec to the AMBE+2™ codec. Required for connection with IDAS™ multi-site trunking /conventional.

REAR PANEL VIEW

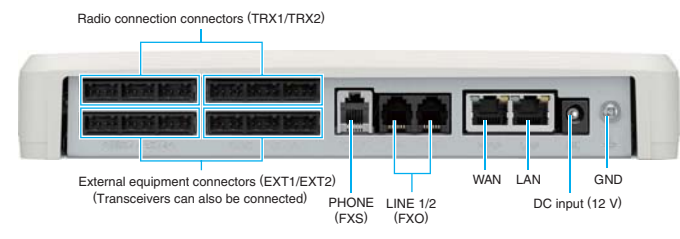

- Supplied accessories : (May differ according to version)
- AC adapter, BC-207S
 - Ferrite core
 - Quick connectors (Spare)
 - Virtual serial port software CD

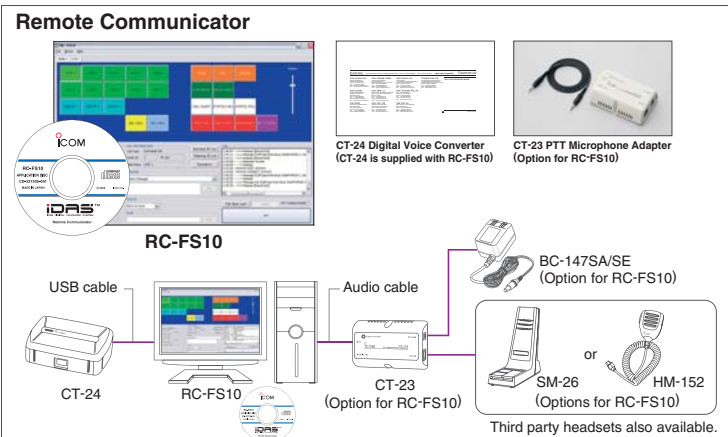

VPN Router
SR-VPN1
The SR-VPN1 VPN router builds VPN tunnels with easy configuration and assists in the Radio over IP communication. Supports IPv4 multicast routing for VE-PG3.

Icom, Icom Inc. and the Icom logo are registered trademarks of Icom Incorporated (Japan) in Japan, the United States, the United Kingdom, Germany, France, Spain, Russia, Australia, New Zealand and/or other countries. IDAS and IDAS logo are trademarks of Icom Incorporated. NXDN is a trademark of Icom Incorporated and JVC KENWOOD Corporation. dPMR is a trademark of the dPMR MoU Association. AMBE+2 is a trademark and property of Digital Voice Systems, Inc. All other trademarks are the properties of their respective holders.

Icom Inc. 1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013 www.icom.co.jp/world Count on us!

Icom America Inc.
12421 Willows Road NE,
Kirkland, WA 98034, U.S.A.
Phone: +1 (425) 454-8155
Fax: +1 (425) 454-1509
E-mail: sales@icomamerica.com
URL: <http://www.icomamerica.com>

Icom (Europe) GmbH
Communication Equipment
Auf der Krautweide 24,
65812 Bad Soden am Taunus, Germany
Phone: +49 (6196) 76685-0
Fax: +49 (6196) 76685-50
E-mail: info@icom-europe.com
URL: <http://www.icomeurope.com>

Icom France s.a.s.
Zac de la Plaine,
1 Rue Brindjone des Moulins, BP 45804,
31505 Toulouse Cedex 5, France
Phone: +33 (5) 61 36 03 03
Fax: +33 (5) 61 36 03 00
E-mail: icom@icom-france.com
URL: <http://www.icom-france.com>

Shanghai Icom Ltd.
No.101, Building 9, Caifuxingyuan Park,
No.188 Maoting Road, Chedun Town,
Songjiang District, Shanghai, 201611, China
Phone: +86 (021) 6153 2768
Fax: +86 (021) 5765 9987
E-mail: bjicom@bjicom.com
URL: <http://www.bjicom.com>

Your local distributor/dealer:

Icom Canada
Glenwood Centre #150-6165
Highway 17A, Delta, B.C.,
V4K 5B8, Canada
Phone: +1 (604) 952-4266
Fax: +1 (604) 952-0090
E-mail: info@icomcanada.com
URL: <http://www.icomcanada.com>

Icom Spain S.L.
Ctra. Rubi, No. 88 "Edificio Can Castanyer"
Bajos A 08174, Sant Cugat del Valles,
Barcelona, Spain
Phone: +34 (93) 590 26 70
Fax: +34 (93) 589 04 46
E-mail: icom@icomspain.com
URL: <http://www.icomspain.com>

Icom (Australia) Pty. Ltd.
Unit 1 / 103 Garden Road,
Clayton, VIC 3168 Australia
Phone: +61 (03) 9549 7500
Fax: +61 (03) 9549 7505
E-mail: sales@icom.net.au
URL: <http://www.icom.net.au>

Icom Brazil
Rua Itororó, 444 Padre Eustáquio
Belo Horizonte MG,
CEP: 30720-450, Brazil
Phone: +55 (31) 3582 8847
Fax: +55 (31) 3582 8987
E-mail: sales@icombrasil.com

Icom (UK) Ltd.
Blacksale House, Altira Park,
Herne Bay, Kent, CT6 6GZ, U.K.
Phone: +44 (0) 1227 741741
Fax: +44 (0) 1227 741742
E-mail: info@icomuk.co.uk
URL: <http://www.icomuk.co.uk>

Asia Icom Inc.
6F No. 68, Sec. 1 Cheng-Teh Road,
Taipei, Taiwan, R.O.C.
Phone: +886 (02) 2559 1899
Fax: +886 (02) 2559 1874
E-mail: sales@asia-icom.com
URL: <http://www.asia-icom.com>



Converter Mode

- Interconnect between IP phone, analog phone and radio networks
- Phone calls can be initiated by radio users

Bridge Mode

- Site-to-site radio communication over an IP network
- Site-to-multisite radio communication
- Cross band, cross category (VHF/UHF land mobile, marine VHF and air band) connection

Common Features

- Interconnect between IDAS™ NXDN™, IDAS™ dPMR™ Mode 2 and IP Advanced Radio System
- Optional RC-FS10 software for virtual PC dispatch station
- Public address, siren, warning light and external equipment connection
- Serial pass-through function between PC and external equipment

