




VHF AND UHF TRANSCEIVERS

**IC-F51** ATEX (VHF Transceiver)

**IC-F61** ATEX (UHF Transceiver)



**INTRINSICALLY SAFE VERSION**

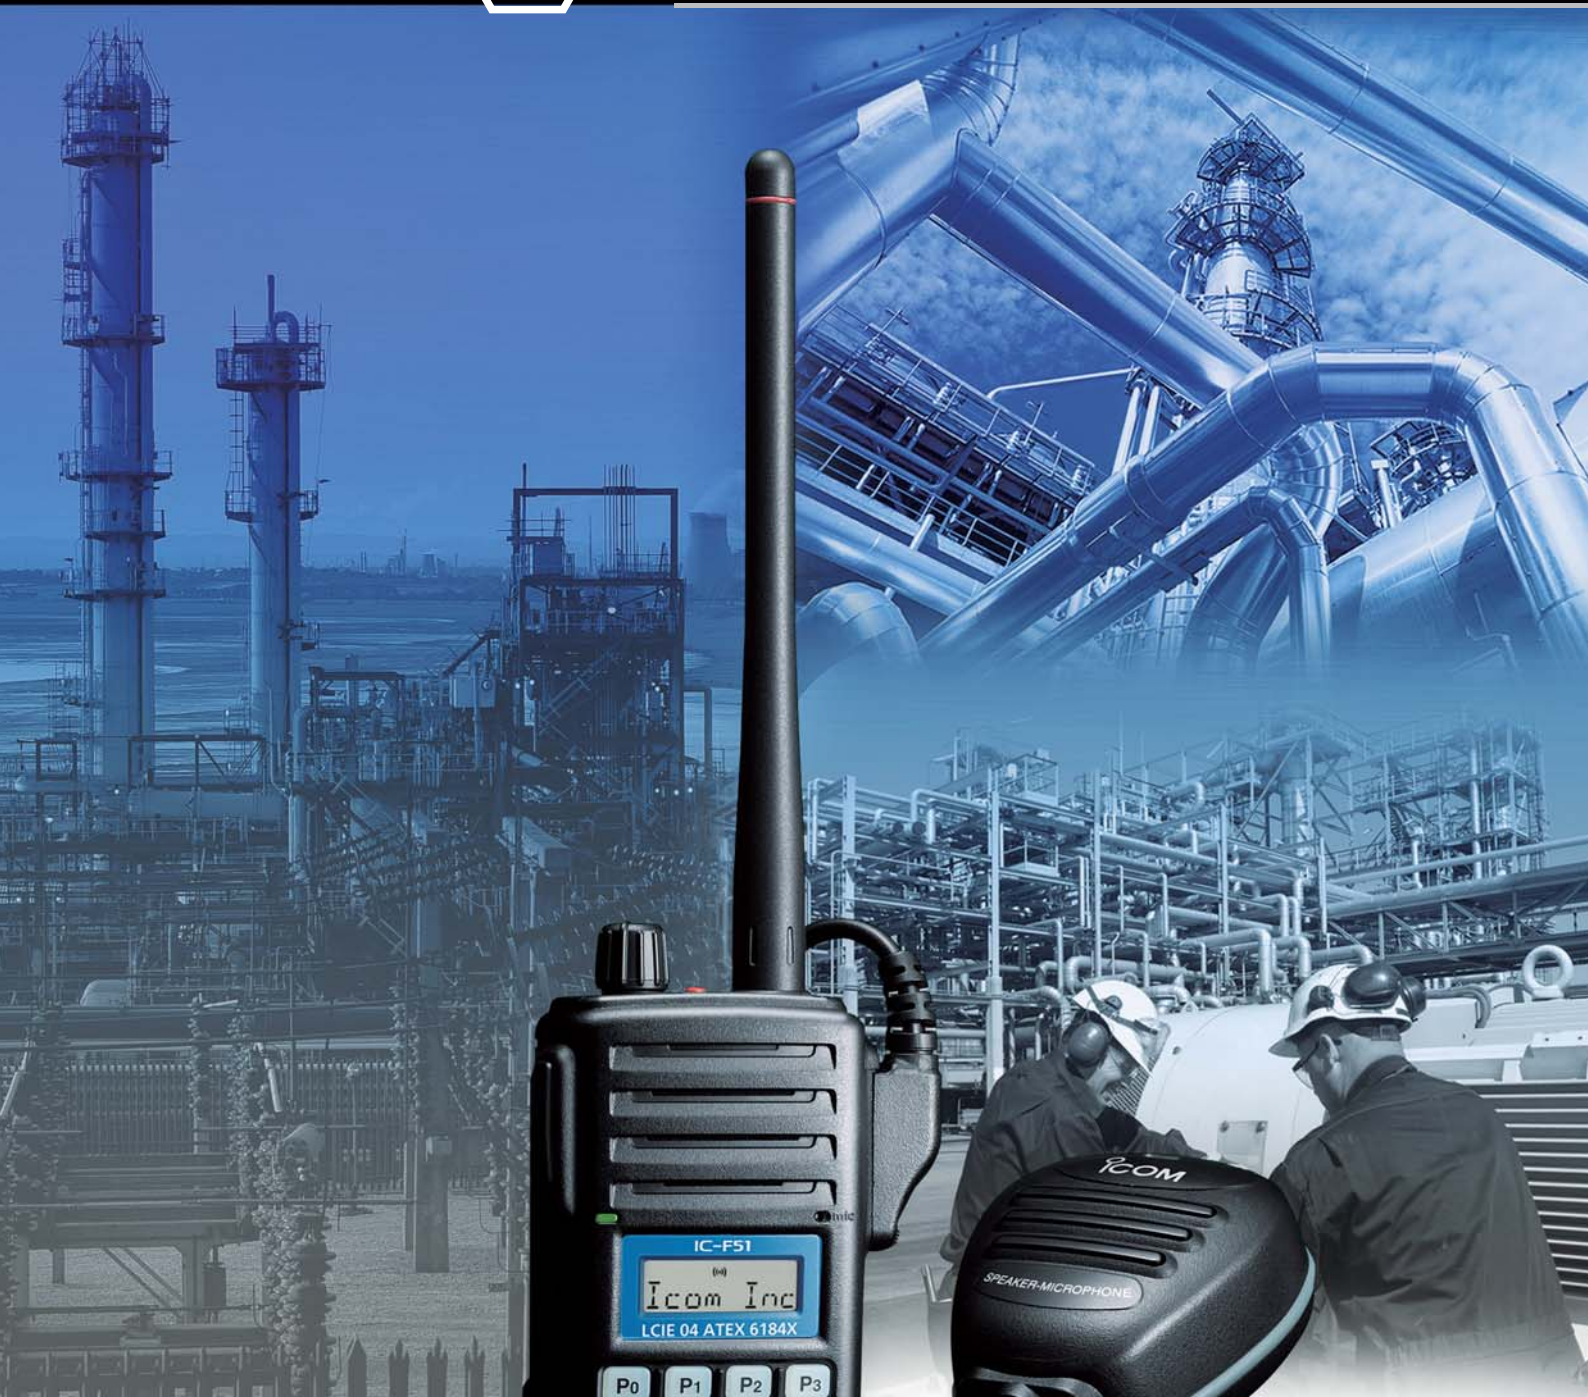

**BIIS 1200**  
Compatible

**IP67**

**Rugged**  
**MIL-STD 810**

Photo includes optional speaker-microphone, HM-138.



# Superior Water Supports De

Firefighters, Police, Security, and many other professions face harsh conditions and challenges, but all have one thing in common: they need reliable communication. Icom's IC-F51/F61 offers a complete solution. Rain or shine, this radio keeps you connected.

## Dust and Waterproof Protection Equivalent to IP67

The gasket sealed waterproof housing provides superior dust and waterproof protection, equivalent to IP67.

Reliable and dependable use in harsh conditions under water or dust, make the IC-F51 / IC-F61 the radio for all situations.

\* 1m depth of water for 30 minutes.



## Built-in Tone Signaling

Use the built-in CTCSS, DTCS, 2-Tone and 5-Tone capability to set up your own talk groups and quiet stand-by when other groups are talking. You can also set up selective calls to individuals or control a repeater.

## Multiple 5-Tone

Up to 8 5-Tone codes can be decoded on a single memory channel. This is perfect for professionals who require multiple district paging on one channel. When a matched tone is received, the following items are programmable for each code.

- Bell icon
- Answer back
- Stun
- Beep sound
- Auto transmit
- Scan
- ID decode
- Emergency cancel

## VHF AND UHF TRANSCIVERS

**IC-F51 ATEX**  
VHF Transceiver

**IC-F61 ATEX**  
UHF Transceiver



▼ IC-F51 ATEX

▼ IC-F61 ATEX



# Waterproof Protection Demanding Communication

and Public utilities. Each profession has its own unique thing in common: the need for reliable communications. Compact waterproof, MIL STD package, that's easy to use. Keeps you in contact in nearly any environment.



## Up to 7 Programmable Buttons

The [P0]–[P3], [Red] and [Up], [Down] buttons are programmable to meet specific needs. The [Red] button on the top panel can be assigned as an emergency trigger.

## Alphanumeric Display

The 8-character alphanumeric display shows channel, bank, tone code and scanning channel names on the display. 7 operational icons on the sub-line show various status at a glance.



Upper and lower case characters available.

## Built-in Voice Scrambler

The IC-F51/F61 has a built-in rolling type voice scrambler equivalent to the UT-110.

## Wide Range Coverage and Large Channel Capacity

The IC-F51 covers 136–174MHz and the IC-F61 covers 400–470MHz in one version. The 128 memory channels with 8 memory banks allows you to divide and store a variety of channels from local to wide area network channels. Wide, middle and narrow\* channel bandwidth is programmable to each channel.

(\* Programmable 25/12.5kHz or 20/12.5kHz Ch.)

## Li-Ion Battery Pack

The large capacity 1950mAh (typ.) Lithium-Ion (Li-Ion) battery pack, BP-227AXD provides a practical 10 hours\* of operating time. Li-Ion batteries allow flexible charging and have almost no memory effect.

\* Typical operation Tx:Rx:Stand-by=5:5:90

## Compact Body

56(W)×97(H)×36.4(D) mm compact body with durable, dependable construction, has been tested to MIL standard specifications. The compact design fits comfortably in your palm, and is easy to carry around.

## BIIS 1200 Compatible

The following selective calling and data features are available with the BIIS system.

- 32 abbreviated call memories
- 7 group IDs
- 24-status Messages
- 8-character SDM (Short Data Message)

## Other Features

- Built-in audio compander
- 8 DTMF autodial memories
- Normal and priority scans
- 2 step power saver
- Busy, repeater lockout functions
- Power ON password, and more...



## ATEX Intrinsically Safe

The IC-F51/F61 ATEX version and designated options are certified to the ATEX Protection Class II 2G Ex ib IIA T3 Gb, II 2D Ex tb IIIC T160°C Db IP67 (Tamb= –20°C to +55°C) as interpreted in the following table. It is suitable for use in hazardous areas where flammable gasses, liquids or conductive dusts are used.

### ATEX Gas Protection

II	2	G	Ex	ib	IIA	T3	Gb	Gb = GAS equipment protection level: High protection
								T3 = Device surface temperature will not exceed 200°C
								IIA = Protection in GAS group
								ib = Intrinsically safety according to EN60079-0 and EN60079-11
								Ex = Explosion proof equipment
								G = Gas, vapour and mist
								2 = High level protection for use in zone 1 (gas)
								II = Group II, other (non-mining) environments

### ATEX Dust Protection

II	2	D	Ex	tb	IIIC	T160°C	Db	IP67	IP67 = IP67 dust and waterproof protection
									Db = Dust equipment protection level: High protection
									T160°C = Maximum temperature of device surface
									IIIC = Dust group: Conductive dust
									tb = Enclosure protection according to EN60079-0 and EN60079-31
									Ex = Explosion proof equipment
									D = Dust
									2 = High level protection for use in zone 21 (dust)
									II = Group II, other (non-mining) environments

\* Please ensure the IC-F51/F61 rating is acceptable for the intended place of use.

### ATEX Gas Group Classification

	T1: 450°C	T2: 300°C	T3: 200°C
I	Methane		
IIA	Acetone	Ethyl alcohol	Benzene
	Ethane	I-amyl acetate	Diesel fuel
	Ethyl acetate	n-butane	Aircraft fuel
	Ammonia	n-butyl alcohol	Heating oil
	Benzene (pure)		n-hexane
	Acetic acid		
	Carbon Monoxide		
	Methanol		
	Propane		
	Toluene		



## SPECIFICATIONS

	IC-F51 ATEX	IC-F61 ATEX IC-F61-L ATEX
GENERAL		
Frequency coverage	136–174MHz	400–470MHz 350–400MHz (Non-RTTE)
Number of channels	Max. 128 channels/ 8 zones	
Type of emission	16K0F3E, 14K0F3E, 8K50F3E	
Channel spacing	12.5/20/25kHz	12.5/20/25kHz 12.5/25kHz (IC-F61-L)
PLL channel step	2.5/3.125kHz	5/6.25kHz
Power supply requirement	7.2V DC nominal	
Current drain (approx.)		
Tx High (at 1W)	0.7A	0.8A
Rx Max. audio	300mA	300mA
Standby	85mA	85mA
Antenna impedance	50Ω (SMA type)	
Operating temperature range	–20°C to +55°C	
Dimensions (W×H×D) (Projections not included)	56×97×36.4mm (With BP-227AXD)	
Weight (approx.)	290g (With BP-227AXD)	
TRANSMITTER		
Output power (at 7.2V DC)	1W	
Max. frequency deviation	±5.0kHz/±4.0kHz/±2.5kHz (W/M/N)	
Frequency stability	±2.5ppm	
Spurious emissions	0.25μW (≤1GHz) 1.0μW (>1GHz)	
Modulation limiting	60–100% of Max. deviation	
Audio harmonic distortion	3% typ. (AF 1kHz 40% deviation)	
Ext. microphone connector	9-pin multi connector/2.2kΩ	
RECEIVER		
Sensitivity (at 20dB SINAD)	–4dBμV typ. (emf)	
Adjacent channel selectivity	75/73/65dB min. (W/M/N)	
Spurious response	70dB	
Intermodulation rejection	67dB typ.	
Hum and noise	55/53/50dB typ. (W/M/N)	
Audio output power	500mW typ. (at 5% distortion with 8Ω load)	
Ext. speaker connector	9-pin multi connector/8Ω	

Measurements made in accordance with EN 300-086.

All stated specifications are subject to change without notice or obligation.

## Applicable U.S. Military Specifications &amp; IP Rating

Standard	MIL 810 F	
	Method	Procedure
Low Pressure	500.4	I, II
High Temperature	501.4	I, II
Low Temperature	502.4	I, II
Temperature Shock	503.4	I
Solar Radiation	505.4	I
Rain Blowing/Drip	506.4	I, III
Humidity	507.4	–
Salt Fog	509.4	–
Dust Blowing	510.4	I
Vibration	514.5	I
Shock	516.5	I, IV

Also meets equivalent MIL-STD-810-C, -D and -E.

Ingress Protection Standard	
Dust & Water	IP67 (Dust-protection and waterproof protection)

## ATEX INTRINSICALLY SAFE TYPE APPROVAL

The approved rating is

Gas: II2G Ex ib IIA T3 Gb

Dust: II2D Ex tb IIIC T160°C Db IP67

(Tamb= –20°C to +55°C)

Special conditions for use: Must be used with **BP-227AXD**

When the transceiver is used in hazardous areas, either the jack cover or HM-138 must be attached to the connector.

\* Note for IC-F51/F61 ATEX Non-Dust (II2G) version users, please use only the **BP-227AX** battery pack with the IC-F51/F61 ATEX Non-Dust version.

## OPTIONS

Some options may not be available in some countries. Please ask your dealer for details.

## BATTERY PACK

BP-227AXD Li-Ion 7.4V  
1850mAh (min.)  
1950mAh (typ.)BATTERY CHARGER<sup>\*2</sup>BC-147S<sup>\*1</sup>

Charges the BP-227AXD in 9–10 hours. (approx.)



BC-152N

RAPID CHARGER<sup>\*2</sup>BC-145S<sup>\*1</sup>

Rapidly charges the BP-227AXD in 2–3 hours. (approx.)



BC-119N+AD-100

MULTI-CHARGER<sup>\*2</sup>

BC-121N+AD-100 (6 pcs.)

Rapid charges up to 6 battery packs in 2–2.5 hours.



BC-157S

SPEAKER-MICROPHONE  
HM-138

IPX7



## BELT CLIPS



MB-98

Alligator type



MB-86

Swivel type

LEATHER BELT  
HANGER  
MB-96F

## ANTENNAS

FA-S24V: 136–150MHz (Blue)

FA-S59V: 150–174MHz (Red)

FA-S27U: 400–470MHz (Green)

## STUBBY ANTENNAS

FA-S62VS: 150–162MHz (Red)

FA-S63VS: 160–174MHz (Green)

FA-S57US: 450–490MHz (Red)

## Supplied accessories: (May differ according to version)

- Battery pack, BP-227AXD
- Belt clip, MB-98
- Antenna

## Icom Inc.

1-1-32, Kamiminami, Hirano-Ku, Osaka 547-0003, Japan Phone: +81 (06) 6793 5302 Fax: +81 (06) 6793 0013

www.icom.co.jp/world

## Count on us!

## Icom America Inc.

12421 Willows Road NE,  
Kirkland, WA 98034, U.S.A.  
Phone: +1 (425) 454-8155  
Fax: +1 (425) 454-1509  
E-mail: sales@icomamerica.com  
URL: http://www.icomamerica.com

## Icom Canada

Glenwood Centre #150-6165  
Highway 17A, Delta, B.C.,  
V4K 5B8, Canada  
Phone: +1 (604) 952-4266  
Fax: +1 (604) 952-0090  
E-mail: info@icomcanada.com  
URL: http://www.icomcanada.com

## Icom Brazil

Rua Itororó, 444 Padre Eustáquio  
Belo Horizonte MG,  
CEP: 30720-450, Brazil  
Phone: +55 (31) 3582 8847  
Fax: +55 (31) 3582 8987  
E-mail: sales@icombrasil.com

## Icom (Europe) GmbH

Communication Equipment  
Auf der Krautweide 24  
65812 Bad Soden am Taunus, Germany  
Phone: +49 (6196) 76685-0  
Fax: +49 (6196) 76685-50  
E-mail: info@icom-europe.com  
URL: http://www.icom-europe.com

## Icom Spain S.L.

Ctra. Rubi, No. 88 "Edificio Can Castanyer"  
Bajos A 08174, Sant Cugat del Valles,  
Barcelona, Spain  
Phone: +34 (93) 590 26 70  
Fax: +34 (93) 589 04 46  
E-mail: icom@icomspain.com  
URL: http://www.icomspain.com

## Icom (UK) Ltd.

Blacksole House, Altira Park,  
Herne Bay, Kent, CT6 6GZ, U.K.  
Phone: +44 (0) 1227 741741  
Fax: +44 (0) 1227 741742  
E-mail: info@icomuk.co.uk  
URL: http://www.icomuk.co.uk

## Icom France s.a.s.

Zac de la Plaine,  
1 Rue Brindejont des Moulins, BP 45804,  
31505 Toulouse Cedex 5, France  
Phone: +33 (5) 61 36 03 03  
Fax: +33 (5) 61 36 03 00  
E-mail: icom@icom-france.com  
URL: http://www.icom-france.com

## Icom (Australia) Pty. Ltd.

Unit 1 / 103 Garden Road,  
Clayton, VIC 3168 Australia  
Phone: +61 (03) 9549 7500  
Fax: +61 (03) 9549 7505  
E-mail: sales@icom.net.au  
URL: http://www.icom.net.au

## Icom New Zealand

39C Rennie Drive, Airport Oaks,  
Auckland, New Zealand  
Phone: +64 (09) 274 4062  
Fax: +64 (09) 274 4708  
E-mail: inquiries@icom.co.nz  
URL: http://www.icom.co.nz

## Asia Icom Inc.

6F No. 68, Sec. 1 Cheng-Teh Road,  
Taipei, Taiwan, R.O.C.  
Phone: +886 (02) 2559 1899  
Fax: +886 (02) 2559 1874  
E-mail: sales@asia-icom.com  
URL: http://www.asia-icom.com

## Shanghai Icom Ltd.

No.101, Building 9, Caifuxingyuan Park,  
No.188 Maoting Road, Chedun Town,  
Songjiang District, Shanghai, 201611, China  
Phone: +86 (021) 6153 2768  
Fax: +86 (021) 5765 9987  
E-mail: bjicom@bjicom.com  
URL: http://www.bjicom.com

Your local distributor/dealer: