

Thank you for purchasing the VS-3 Bluetooth® HEADSET.

This headset is compatible with Bluetooth® operation, and includes a [PTT] switch.

Please read these instructions carefully and completely before using.

Connecting the headset to other Bluetooth® device

Pairing is a process to be able to establish a connection between a headset and other Bluetooth® devices. Once pairing is established with the device, there is no need to pair again.

- The indications or operation may differ, depending on the Bluetooth® devices. See the instruction manuals of the devices for details.
- The headset operation may differ, depending on the connected device's profile.
- If the pairing fails, turn OFF the headset, and then repeat from step ①.

In this manual, a transceiver with the Bluetooth® unit is described as simply "transceiver."


Enter "0000" (four zeros), if a Passkey (PIN code) is required.

NOTE:

You may not find a target Bluetooth® device, if there are many other Bluetooth® devices nearby. In that case, stop using those devices or move away from them.

When connecting to a transceiver

- ① If the power is OFF, push [PWR] for 6 seconds.
 - A melody sounds when the power is turned ON.
 - The LED alternatively blinks red and blue, and then the headset enters the pairing mode.



- ② Setting a transceiver.

Turn ON the transceiver's Bluetooth® function, and then pair with the VS-3.

Example: When using the ID-5100A/E

- ① Turn ON the transceiver.
- ② Touch [MENU].
- ③ Touch "Bluetooth."
(Bluetooth setting > Bluetooth)
- ④ Touch "ON."
- ⑤ Touch "Pairing/Connect."
- ⑥ Touch "Device Search."
- ⑦ Touch "Search Headset."
• "ICOM BT-002" is displayed on the transceiver's display.
- ⑧ Touch "ICOM BT-002."
- ⑨ Touch [YES].
• Starts the connection.

- ③ Check the LED status.

- When the connection is completed, the LED blinks blue.
- When the connection is completed, "(Connect)" is displayed on the transceiver's screen.

When connecting to a Bluetooth® mobile device

- ① If the power is OFF, push [PWR] for 6 seconds.
 - A melody sounds when the power is turned ON.
 - The LED alternatively blinks red and blue, and then the headset enters the pairing mode.
- ② Setting your mobile device.
 - ➔ Turn ON the mobile device's Bluetooth® function, and then pair with the VS-3.
 - See the mobile device's instruction manual for details.
- ③ Check the LED status.
 - When the connection is completed, the LED blinks blue.

NOTE:

Some mobile device may not be able to pair with the VS-3. You may not be able to use some Bluetooth® features, depending on the mobile device.

Automatic Power OFF function

After disconnecting, or if no Bluetooth® device is found after the power is turned ON, the VS-3 automatically turns OFF after 10 minutes.

When the VS-3 is not connected to any device, even if the power is ON, the LED blinks blue.

Transmit from a transceiver using the VS-3

This section describes how to transmit from a transceiver using the VS-3.

First, set the frequency and the operating mode.


- ① While holding down [PTT], speak to transmit.
 - When transmitting, the LED alternately blinks red once and blue twice.
- ② Release [PTT] to receive.

For your reference:

When the One-touch PTT function is set to ON on the transceiver, pushing [PTT] toggles transmitting and receiving.

When the transceiver's VOX function is set to ON, you can use the headset for hands-free operation.

See the transceiver's instruction manual for details.




Hands-free operation with your Bluetooth® mobile device

This section describes how to use the hands-free operation with your Bluetooth® mobile device.

Making a call

- ① Make a call on your mobile device.
- ② Push [FWD].
 - You can communicate with the hands-free operation.
 - The LED blinks twice in blue in every 5 seconds.
 - Depending on the connected mobile device, you may not be able to use the hands-free operation.
- ③ Push [FWD].
 - Returns to the normal operation mode.

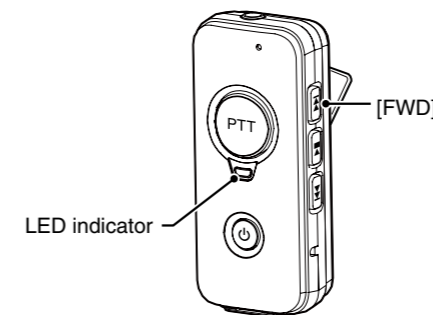

Answering a call

- ➔ When a ring tone sounds, push [PWR].
 - You can communicate with the hands-free operation.
 - The ring tone sounds even if your mobile device is in the manner mode.

NOTE:

If you hold down [PWR] for more than 3 seconds, the headset power is turned OFF.

Disconnecting

- ➔ Push [PWR].

Playing music

To play music, the Bluetooth® device must correspond to the A2DP profile. Confirm your Bluetooth® device's profile.

/// The supplied earphone is not for listening to music.

/// We recommend that you purchase a third party earphone to listen to music.

Playing or Pausing music

- 1 Select the music that you want to play in your mobile device.
- 2 Push [PLAY].
 - While playing music, push [PLAY] to pause.
 - While playing music, the LED blinks blue twice every 2 seconds.

Stopping music

- ➔ While playing or pausing music, push [PLAY] to stop.
 - Music starts from the beginning by pushing the play switch after the music stops.

Rewind music

- ➔ While playing or pausing music, push [RWD] to rewind.
 - While holding down [RWD], the headset continues to rewind.

Forward music


- ➔ While playing or pausing music, push [FWD] to forward.
 - While holding down [FWD], the headset continues to forward.

Playing next music

- ➔ Push [FWD].

Playing previous music

- ➔ While stopping music, push [RWD].
 - While playing music, the LED blinks twice in blue in every 2 seconds.

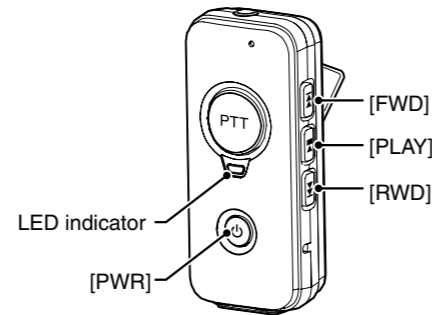


NOTE:

The operation may differ, depending on the Bluetooth® device or music player application. You may not be able to use some Bluetooth® functions, depending on the Bluetooth® device.

Initializing the headset

If abnormalities occur on the headset, turn OFF the power, and then turn it ON again after a few seconds. If the condition continues, initialize the headset.


- 1 Turn OFF the power.
 - If the power is ON, hold down [PWR] for 3 seconds.
- 2 After holding down [PWR] for 2 seconds, simultaneously hold down both [PWR] and [VOL](-) for 10 seconds.
 - The LED lights purple, and then turns OFF.

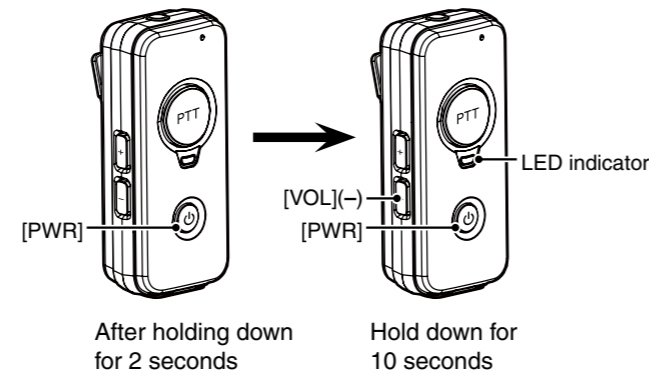

Forced termination

If the headset does not operate normally, try the following to perform a force power OFF.

- ➔ Push [RESET].



Functions

The following list shows the VS-3s functions, operation, sound and the LED indications. Some functions may not be usable, depending on the transceiver using the headset.

Connecting to the transceiver with a Bluetooth® unit

Function	Operation	Sound	LED indication	Note
Turning ON the power	Hold down [PWR] for 3 seconds.	Melody sounds (Scale goes up.)	Blinks blue	
Turning OFF the power	Hold down [PWR] for 3 seconds.	Melody sounds (Scale goes down.)	Turns OFF	
Pairing	While the power is OFF, hold down [PWR] for 6 seconds.	PiPa- PiRo	• Alternatively blinks red and blue while waiting for a connection. • Blinks blue twice every 3 seconds when the connection is completed.	
Switching to the mobile device	While using the transceiver connected to a mobile device, hold down [PWR] for 2 seconds.	Pi	Blinks blue twice	Automatically switch to the transceiver when the transceiver receives a signal.
Transmission	Push [PTT]	—	Alternatively blinks red once and blue twice every 3 seconds.	
Volume up	Push [+]	Long beep (High tone) [†]	Blinks twice in blue	[†] Sounds when a maximum level is selected.
Volume down	Push [-]	Long beep (Low tone) [‡]	Blinks blue twice	[‡] Sounds when a minimum level is selected.
Increase the MIC gain* ¹	Push [+] while holding down [PTT].	PiPiPi	—	
Decrease the MIC gain* ¹	Push [-] while holding down [PTT].	Pi	—	
Changing the frequency, Memory or Call channel.* ²	Up: Push [▶▶] Down: Push [◀◀]	Pi	Blinks blue twice	Select the item in the operating screen.
Switching between FROM and TO selection.* ²				
Play/Pause* ²	Push [▶■]	Pi	Blinks blue twice	
Forward* ²	Push [▶▶]	Pi	Blinks blue twice	
Rewind* ²	Push [◀◀]	Pi	Blinks blue twice	
Forcibly shutdown	Push [RESET]	—	Turns OFF	
Charging	Refer to instruction manual ①	—	Lights red	

When the connection is disconnected from the transceiver, two beeps sound.

*¹ The MIC gain has three levels. When the level 3 is selected, 3 beeps sound, the level 2 is selected, 2 beeps sound, and the level 1 is selected, a bees sounds.

*² You can assign these key functions from the transceiver.

Connecting to the Bluetooth® mobile device

Function	Operation	Sound	LED indication	Note
Turning ON the power	Hold down [PWR] for 3 seconds.	Melody sounds (Scale goes up.)	Blinks blue	
Turning OFF the power	Hold down [PWR] for 3 seconds.	Melody sounds (Scale goes down.)	Turns OFF	
Pairing	While the power is OFF, hold down [PWR] for 6 seconds.	PiPa- PiRo	• Alternatively blinks red and blue while waiting for a connection. • Blinks blue twice every 3 seconds when the connection is completed.	
Switching to the transceiver	Push [PTT].	Pi		
Making a call	Push the power switch			
Receiving a call	Push the power switch	—	Blinks blue twice every 3 seconds.	
Disconnecting a call	Push the power switch			
Volume up	Push [+]	Long beep (High tone) [†]	Blinks blue twice.	[†] Sounds when a maximum level is selected.
Volume down	Push [-]	Long beep (Low tone) [‡]	Blinks blue twice.	[‡] Sounds when a minimum level is selected.
Play/Pause	Push [▶■]	Pi	Blinks blue twice.	
Stop	Push [▶■]			
Forward	Push [▶▶]	Pi	Blinks blue twice.	
Rewind	Push [◀◀]	Pi	Blinks blue twice.	
Forcibly shutdown	Push [RESET]	—	Turns OFF.	
Charging	Refer to the instruction manual ①	—	Lights red.	

When the VS-3 is connected to both a paired transceiver and the mobile device, the transceiver has priority. However, when you push [PWR] while operating the transceiver, the connection switches to the mobile device. Pushing [PTT] returns to the transceiver connection.

Icom Inc.

1-1-32 Kamiminami, Hirano-ku, Osaka 547-0003, Japan

Count on us!

A-7139W-2EX-① Printed in Japan
© 2014–2016 Icom Inc.